

## ANALYSIS OF SOLID AND HOLLOW SHAFT USING MOD-GOODMAN METHOD

Musa M. Allafi<sup>a</sup>, Osama M. AlMakhzom<sup>b</sup>

<sup>a</sup>Higher Institution of Marine Science Technologies – AL khoms, Libya

<sup>b</sup> Engineering and Information Research Center. Bani Walid, Libya

[mm.allafi@gmail.com](mailto:mm.allafi@gmail.com)

[elshouki.ali@gmail.com](mailto:elshouki.ali@gmail.com)<sup>[1]</sup>

Received: 30-09-2025; Revised: 10-10-2025; Accepted: 31-10-2025; Published: 25-11-2025

**Abstract** -Power shafts are the most crucial components of a machine, and they are frequently subject to fatigue due to variable external loads. The goal of this research is to design solid and hollow shafts with constant load and torque in order to anticipate the percentage reduction in shaft mass and change in diameter. The modified Goodman approach was used to calculate the shaft's diameter, which was then compared to the maximum shear stress method. The results show that hollow shafts have a 28% lower mass than solid shafts with the same material and strength, while hollow shafts have a 5% higher outer diameter. When using maximum share stress theory, the results show that the diameter of the designed shaft increases slightly.

**Index Terms:** Power Shaft, Hollow Shaft, Solid Shaft, Mod\_Goodman Method, Fatigue.

### I. INTRODUCTION

The rotating components that transmit power in machines are called shafts. Typically, they are made of low- or medium-carbon steel and have a circular cross section. They can be solid or hollow. As a ubiquitous and significant rotating machine component, shafts support a variety of transmission components, including gears and pulleys. The main difference between a solid shaft and a hollow shaft is that the cross-sectional area of the hollow shaft is spread away from the axis of rotation, while the cross-sectional area of the solid shaft is spread closer to the axis of rotation. The hollow shaft has a greater moment of inertia than the solid shaft for the same weight per unit length of shaft. Therefore, hollow shafts are stiffer than solid shafts in terms of torsional and bending forces; but for the same objective, a hollow shaft's diameter is larger than a solid shaft's, requiring more space.

Due to the advantages of hollow columns, especially their light weight and hardness compared to solid ones, and due to their exposure (whether solid or hollow) to different loads during their work, which generates different stresses on the material of the shafts, it is important to study the effect of these forces and the extent to which the design (outer diameter of the shaft) differs between the hollow and solid types. The Mod-Goodman method is widely used to study and analyze shaft stresses to compute the fatigue effect on the component, as all machines and structures are subject to fatigue (Osgood, 1982 [1]; Stephen, 2018 [2]). The design and optimization of shafts under fatigue loading were investigated by Gujar (2013) [3] and Deepan (2011) [4]. According to Rakesh et al. (2018), aluminum with a BLF composite hollow pit is accurate in terms of weight curtailment, but only by 1.16% when compared to

In this work, Mod-Goodman method was used to design and analyze stresses of solid and hollow power shafts to verify mass reduction of the designed shaft. Besides that, the increasing of outer diameter and fatigue resistance were considered.

### II. METHODOLOGY

The suggested shaft is 300 mm long, with different diameters contingent on the outcome of the design. As shown in figures 1 and 2, it is subjected to a torque of 300 N.m. and a single force of 1000 N operating on the

pulley. Table 1 displays the characteristics of the various carbon steel grades employed in the design. The mod-Goodman equation and maximum shear stress method are used in this work to compute the diameters of the solid and hollow shafts in accordance with the mentioned boundary conditions. The mass of both kinds of shafts is then determined; this process was carried out seven times in accordance with various material grades. Plotting the findings against mod-Goodman lines thus guarantees the finite life of the designed shafts.

Table 1. Material properties

AISI / CD	$S_{ut}$ (MPa)	$S_y$ (MPa)	$\rho$ (g/cm <sup>3</sup> )
AISI 1010	370	300	7.87
AISI 1018	440	370	7.87
AISI 1020	470	390	7.87
AISI 1030	520	440	7.85
AISI 1035	550	460	7.85
AISI 1040	590	490	7.84
AISI 1050	620	580	7.85

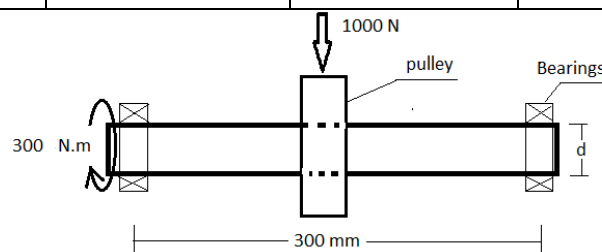


Figure 1: Studied Model (Solid Shaft)

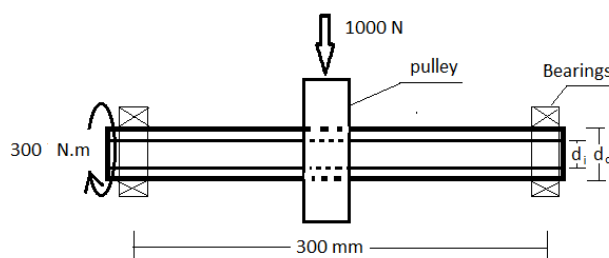


Figure 2: Studied Model (Hollow Shaft)

### III. SOLID AND HOLLOW SHAFT DESIGN USING MOD-GOODMAN

The Mod-Goodman equation (1) is used in a tensile region where compression stress has little effect on fatigue safety factor (Stephen K.2018 - [2]). Since the shafts in our case are subjected to bending and torsion, in fluctuating assuming no axial force on the shafts, thus, the bending and torsional stresses have alternating and midrange components, using von Mises stresses formulas (equations 2 and 3) for the two stress elements with fatigue factors ( $K_f$  for moment and  $K_{fs}$  for shear), equations 4 and 5 can be obtained (Shigley.2015 - [6]).

$$\frac{1}{n} = \frac{\sigma'_a}{S_e} + \frac{\sigma'_m}{S_{ut}} \quad \dots \dots \dots (1)$$

$$\sigma'_a = [\sigma_a^2 + 3 \tau_a^2]^{1/2} \quad \dots \dots \dots (2)$$

$$\sigma'_m = [\sigma_m^2 + 3 \tau_m^2]^{1/2} \quad \dots \dots \dots (3)$$

For the solid shaft:

$$\sigma'_a = \left[ \left( \frac{32K_F M_a}{\pi d^3} \right)^2 + 3 \left( \frac{16K_{fs} T_a}{\pi d^3} \right)^2 \right]^{1/2} \quad \dots \dots \dots (4)$$

$$\sigma'_m = \left[ \left( \frac{32K_F M_m}{\pi d^3} \right)^2 + 3 \left( \frac{16K_{fs} T_m}{\pi d^3} \right)^2 \right]^{1/2} \quad \dots \dots \dots (5)$$

And for hollow shafts:

$$\sigma'_a = \left[ \left( \frac{32K_F M_a}{\pi d_o^3 (1 - k^4)} \right)^2 + 3 \left( \frac{16K_{fs} T_a}{\pi d_o^3 (1 - k^4)} \right)^2 \right]^{1/2} \quad \dots (6)$$

$$\sigma'_m = \left[ \left( \frac{32K_F M_m}{\pi d_o^3 (1 - k^4)} \right)^2 + 3 \left( \frac{16K_{fs} T_m}{\pi d_o^3 (1 - k^4)} \right)^2 \right]^{1/2} \quad \dots (7)$$

Where,  $d_o$  is the outer diameter of hollow shaft and  $k$  is  $d_i/d_o$ ,  $d_i$  is the inner diameter of hollow shaft.

Applying these equations to the Mod-Goodman equation (1), taking into consideration rotational shafts such as ours with constant bending and torsion:  $M_m = T_a = 0$ , the diameter of a specified shaft can be computed using equations 8 and 9 for solid and hollow shafts.

$$d = \left\{ \frac{16n}{\pi} \left[ \frac{2K_F M_a}{S_e} + \frac{(3(K_{fs} T_m)^2)^{1/2}}{S_{ut}} \right] \right\}^{1/3} \quad \dots (8)$$

$$d_o = \left\{ \frac{16n}{\pi(1 - k^4)} \left[ \frac{2K_F M_a}{S_e} + \frac{(3(K_{fs} T_m)^2)^{1/2}}{S_{ut}} \right] \right\}^{1/3} \quad \dots (9)$$

The calculation parameters that are used in this work are illustrated in table 2 and the endurance limit  $S_e$  was calculated using Marin equation as below (Shigley.2011 - [6]):

$$S_e = k_a k_b k_c k_d k_e f'_e \quad \dots \dots \dots (10)$$

Using  $f'_e = \frac{S_{ut}}{2}$  to predict rotary beam test specimen endurance limit.

Table 2. calculation parameters

parameter	value
Fatigue safety factor $n$	2.5
$K_f$	2.14

$K_s$	3
$K (d_i/d_o)$	0.6
$k_a$ (Machined CD)	0.832
$k_b$	1
$k_c$	1
$k_d$ (50 C°)	1
$k_e$ (90% reliability)	0.814

#### IV. SOLID AND HOLLOW SHAFT DESIGN USING MSS

The diameter of the shaft can be calculated in another way using maximum shear stress method (equation 11) (Steven R. Schmid.2014 - [8]), which does not account for the endurance limit and the fatigue factor of safety. Naturally, this approach forecasts a broad design approximation unless fatigue considerations play a significant role in machine design. This technique was used in this work to determine the diameter of both solid and hollow designed shafts in order to illustrate how fatigue considerations affect machine design. Equations 12 and 13 can be used to determine the diameters of designed shafts.

$$\frac{\pi}{16} \tau_{max} d^3 = [M^2 + T^2]^{1/2} \dots \dots \dots (11)$$

$$d = \left[ \frac{16 [(k_f M)^2 + (k_{fs} T)^2]^{1/2}}{\pi \tau_{max}} \right]^{1/3} \dots \dots (12)$$

$$d_o = \left[ \frac{16 [(k_f M)^2 + (k_{fs} T)^2]^{1/2}}{\pi \tau_{max} (1 - k^4)} \right]^{1/3} \dots \dots (13)$$

#### V. VON MISES STRESS COPONENTS

Von Mises stress components ( $\sigma'_a$  and  $\sigma'_m$ ) must be identified in order to apply Langer equation (14) (Shigley.2015 - [6]) to study the first-cycle yielding and to graphically employ the Mod-Goodman line. Equations (4 and 5) can be used to compute von Mises stress components while taking  $M_m = T_a = 0$  into account.

$$n_y = \frac{S_y}{\sigma'_a + \sigma'_m} \dots \dots (14)$$

#### VI. RESULT AND DISCUSSION

Results of the Mod-Goodman method has been filled in the table 3. These data were presented by figure 3 and figure 4.

The results reveal a significant reduction in mass for hollow shafts compared to solid shafts of the same material and strength. Hollow shafts, on the other hand, have a larger outer diameter than solid shafts; the

average mass decrease is 28%, while the average diameter increase is approximately 5%. According to A. Fierek (2020) [7], the percentage difference between solid and hollow shafts is 39% for a 32 mm diameter.

Results of the MSS method was illustrated in the table 4, and presented by figure 5 and figure 6. These findings also reveal a significant decrease in the mass of the hollow shafts while increasing their outer diameter.

The average mass reduction is 29.5%, while the average diameter increase is 4%. The outside diameters computed using this method are clearly smaller than those obtained using the Mod-Goodman method. This, of course, is due to the lack of fatigue consideration.

Table 3. Results of Mod-Goodman method

	Solid	Hollow		Solid	Hollow
AISI / CD	d (mm)	do (mm)	di (mm)	mass (kg)	
AISI 1010	45	47	28	3.75	2.64
AISI 1018	42	44	26	3.27	2.34
AISI 1020	41	43	25	3.12	2.27
AISI 1030	40	42	25	2.96	2.11
AISI 1035	39	41	24	2.81	2.04
AISI 1040	38	40	24	2.67	1.89
AISI 1050	36	38	22	2.4	1.77

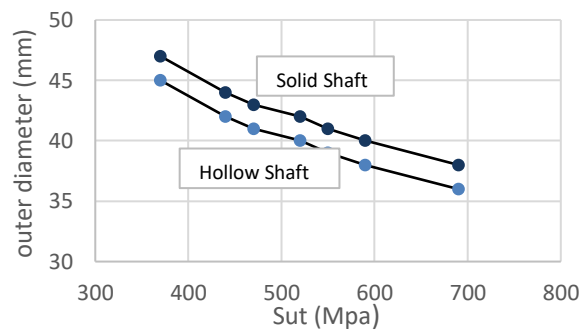


Figure 3: Designed diameter for solid and hollow shafts using Mod-Goodman method

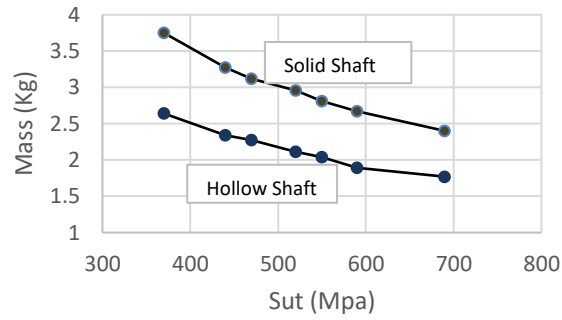


Figure 2: Mass of designed solid and hollow shafts using Mod-Goodman method

Table 4. Results of MSS method

	Solid	Hollow		Solid	Hollow
AISI / CD	d (mm)	do (mm)	di (mm)	mass (kg)	
AISI 1010	43	45	27	3.43	2.4
AISI 1018	40	42	25	2.97	2.11
AISI 1020	40	41	24	2.97	2.05
AISI 1030	38	40	24	2.68	1.9
AISI 1035	37	39	23	2.54	1.84
AISI 1040	37	38	22	2.54	1.78
AISI 1050	35	36	21	2.27	1.58

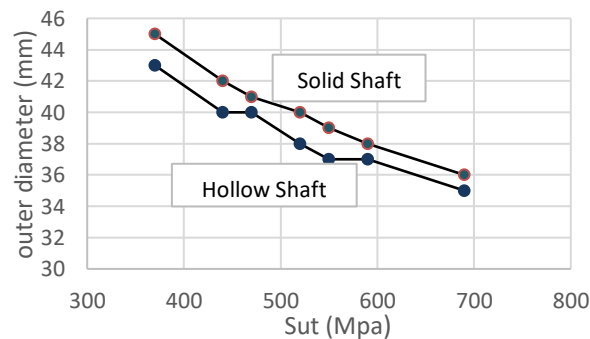


Figure 5: Designed diameter for solid and hollow shafts using MSS method

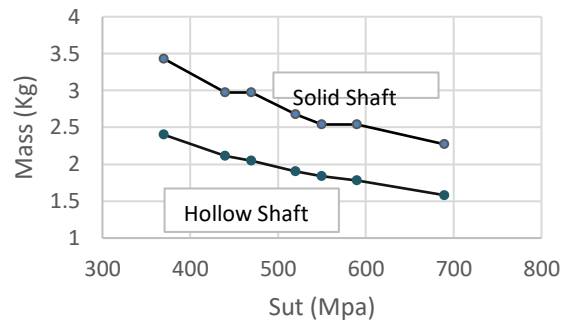


Figure 6: Mass of designed solid and hollow shafts using MSS method

Table 5 depicts the Von Mises component results ( $\sigma'_a, \sigma'_m$ ), which are represented in Figures 7 and 8. They show that solid and hollow shafts in this study have nearly identical Von Mises stress components, and the factor of safety against first-cycle yield is bigger than the fatigue factor of safety ( $n=2.5$ ). As a result, there is no localized yielding, and fatigue will come first.

Table 5. Results of Von Mises components calculation

	Solid			Hollow		
AISI / CD	$\sigma'_a$ MPa	$\sigma'_m$ MPa	$n_y$	$\sigma'_a$ MPa	$\sigma'_m$ MPa	$n_y$
AISI 1010	17.95	87.2	2.85	18.01	87.9	2.83
AISI 1018	22.08	107.2	2.86	22.06	107.1	2.86
AISI 1020	23.73	115.3	2.81	23.64	114.8	2.82
AISI 1030	25.56	124.1	2.94	25.36	123.2	2.96
AISI 1035	27.57	133.9	2.85	27.27	132.4	2.88
AISI 1040	29.81	144.8	2.81	29.36	142.6	2.85
AISI 1050	35.06	170.3	2.83	34.25	166.3	2.89

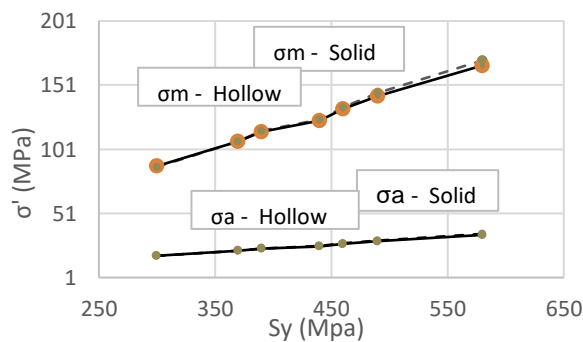


Figure 7: Von Mises stress components

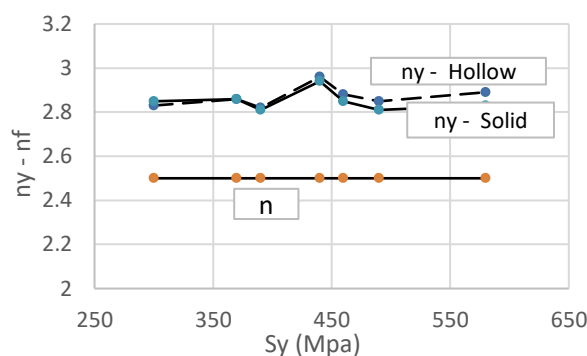


Figure 8: factor of safety guarding against first-cycle yield

The Von Mises component results were plotted on Mod-Goodman lines, as illustrated in Figures 9 and 10. According to those figures, the working points in our case are below the Yield (Langer) and Mod-Goodman lines, indicating that the design is free of first-cycle yielding and has infinite life.

## VII. CONCLUSION

The results show a considerable reduction in the mass of hollow shafts compared to solid shafts with the same material and strength of 28% on average, while the outer diameter of hollow shafts increases by roughly 5% when compared to solid shafts. The results show a minor increase in the diameter of the proposed shaft when maximum share stress method is employed compared to Mod-Goodman method since the fatigue factor of safety is not applied in the first method. Furthermore, calculations show that the design is safe and has infinite life for both solid and hollow shafts, with all working points falling below Mod-Goodman and Langer lines.

## VIII. RECOMMENDATIONS

An experimental investigation should be conducted to support the results of this study, and software such as ANSYS should be implemented.

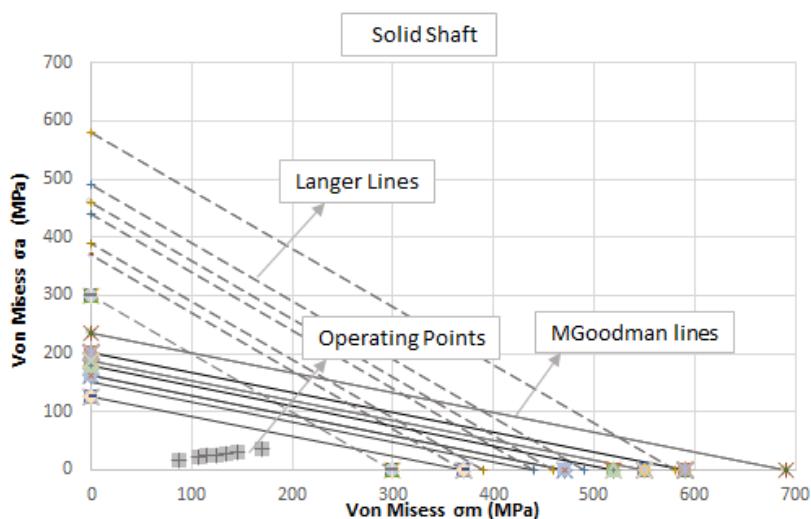


Figure 9: Fatigue diagram shows Mod-Goodman lines (Solid Shafts)



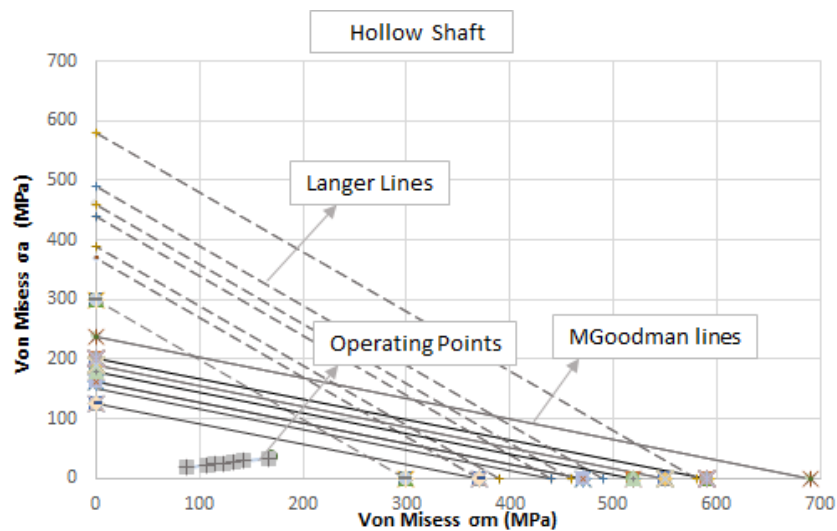


Figure 10 Fatigue diagram shows Mod–Goodman lines (Hollow Shafts)

## REFERENCES

- [1] Osgood CC. Fatigue design, Oxford: Pergamon press; 1982.
- [2] Stephen K. Preliminary Design of a Power Transmission Shaft Under Fatigue using ASME Coad.2018.
- [3] R.A. Gujar, and others. Shaft Design Under Fatigue Loading by Using Modified Goodman Method.2013.
- [4] Deepan M. and others. Optimization of Shaft Design Under Fatigue Loading Using Goodman Method.2011.
- [5] Rakesh and others. Design and Analysis of Hollow and Solid Shaft. 2018.
- [6] Shigley. Mechanical Engineering Design.2015.
- [7] A. Fierek, and others. Analysis of shaft selection in terms of stiffness and mass.2020.
- [8] Steven R. Schmid. Fundamentals of Machine Elements.2014.